ENGLISH

LG
Life's Good

LAC3900N / LAC5900N / LAC6900N

Downloaded from Caradio-Manual.com Manuals

Table of Contents

3 Safety Note
4 [LAC3900N / LAC5900N] Front Panel / Remote Control
5 [LAC6900N] Front Panel / Remote Control
6 [LAC3900N / LAC5900N] About Detachable Control Panel
7 [LAC6900N] About Detachable Control Panel
8 Installation
- Basic installation
- Removing the existing receiver unit
- ISO-DIN installation
- Battery installation

9 Connection
10 Basic operation
- Mute
- Using the EQ
- Adjusting the sound level
- XDSS+(Extreme Dynamic Sound System)
- Checking the clock
- Setting the clock

11 Listening to a CD
- Pause or restart a CD
- Search for a section within a track / file
- Skip to another track / file
- Intro scan
- Repeat
- Shuffle
- MP3/WMA Track -10 / +10
- MP3/WMA Folder UP/DOWN
- Checking information about your music

12 Listening to the radio
- Auto search memory
- Storing and recalling broadcast frequencies
- To scan the preset stations
- To tune in the preset stations

Connecting USB device (Optional)
13 Connecting an Auxiliary Equipment
Changing settings
14 Troubleshooting
15 Specifications

Downloaded from Caradio-Manual.com Manuals

Safety Note

CAUTION

RISK OF ELECTRIC SHOCK DO NOT OPEN

CAUTION : TO REDUCE THE RISK OF ELECTRIC SHOCK DO NOT SPLIT COVER(OR BACK) NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

This lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of uninsulated dangerous voltage within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.

The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.

Always operate the vehicle in a safe manner.
Do not become distracted by the vehicle while driving, and always be fully aware of all driving condition. Do not change settings, or any functions. Pull over in a safe and legal manner before attempting such operations.

Do not use for many hours at extremely low or high temperature. (-10~60°C)

To reduce the risk of electric shock, do not remove the cover or back of this product. There are no user-serviceable parts inside. Refer servicing to qualified service personnel.

To reduce the risk of fire or electric shock, do not expose this product to dripping or splashing water, rain, or moisture.

The temperature of unit's outside can be extremely high, please use the unit after proper installation in your vehicle.



This unit cannot play 8cm disc (use 12cm disc only).

CAUTION : This product uses a Laser System.
To ensure proper use of this product, please read this owner's manual carefully and retain it for future reference.
Should the unit require maintenance, contact an authorized service center. Performing controls, adjustments, or carrying out procedures other than those specified herein may result in hazardous radiation exposure.
To prevent direct exposure to laser beam, do not try to open the enclosure. Visible laser radiation when open. DO NOT STARE INTO BEAM.

CLASS 1 LASER PRODUCT
KLASSE 1 LASER PRODUKT
LUOKAN 1 LASER LAITE
KLASS 1 LASER APPARAT
CLASSE 1 PRODUIT LASER

Caution
When being connected in a wrong way, the unit displays as follows.
- Antenna port short : "**ANTENNA ON PORT SHORT CIRCUIT CHECK**"

After connecting it again, restart the unit.

You have to set the disc format option to [Mastered] in order to make the discs compatible with the LG players when formatting rewritable discs.
When setting the option to Live File System, you cannot use it on LG players.
(Mastered/Live File System : Disc format system for Windows Vista)

Downloaded from Caradio-Manual.com Manuals

[LAC3900N / LAC5900N] Front Panel / Remote Control

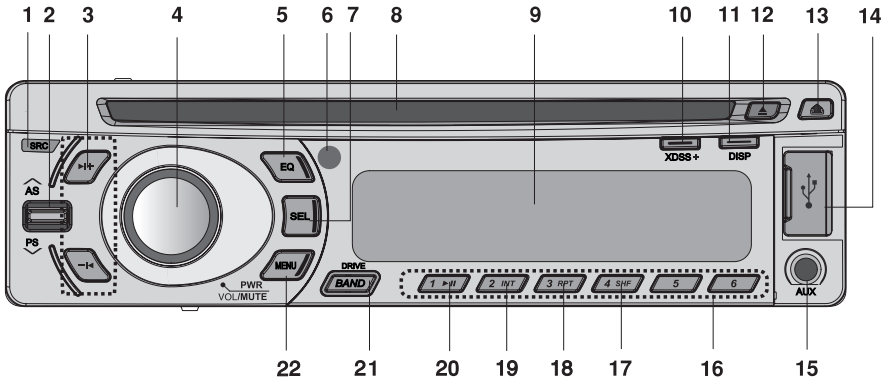

1 SOURCE [**SRC**]
2 • Auto Store [**∧/AS**]
• Preset Scan [**∨/PS**]
• MP3/WMA Track +10/-10 **∧/∨**
• Folder Up/Down **∧/∨**
3 Skip / Search / Seek / Tune **-I◀ / ▶I+**
4 • Volume
• [**MUTE**]
• Power [**PWR**]
5 Equalizer [**EQ**]
6 Remote Sensor(Optional)
7 Select [**SEL**]
8 CD slot
9 Display window
10 Extreme Dynamic Sound System [**XDSS+**]
11 Display [**DISP**]
12 Eject ⏏
13 Release ⏏
14 USB slot(Optional)
15 AUX in
16 Preset Station [**1~6**]
17 Shuffle [**SHF**]
18 Repeat [**RPT**]
19 Intro Scan [**INT**]
20 Play/Pause **▶/II**
21 • [**BAND**]
• [**DRIVE**] (Optional)
22 • [**MENU**]

LAC3900N

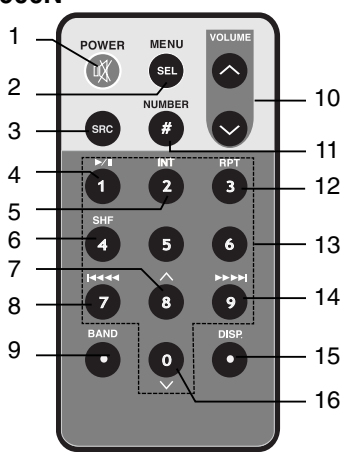

LAC5900N

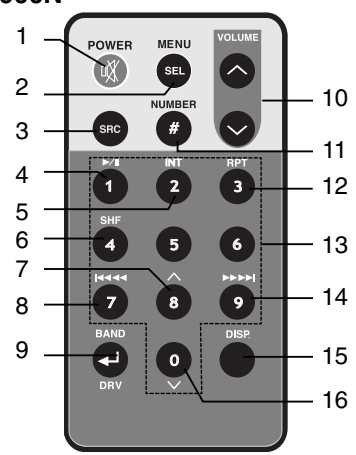

1 Power [**POWER**] / Mute
2 Select [**MENU/SEL**]
3 Source [**SRC**]
4 Play / Pause **▶/II**
5 Intro Scan [**INT**]
6 Shuffle [**SHF**]
7 • MP3/WMA Track +10
• Folder Up **∧**
• Auto Store
8 • CD Skip / Search
• Seek / Tune **I◀◀ ◀◀**
9 • [**BAND**]
• DRIVE [**DRV**] (Optional)
10 Volume Up ∧ / Down ∨
11 Number [**#**]
12 Repeat [**RPT**]
13 Number [**0 -9**]
14 • CD Skip / Search
• Seek / Tune **▶▶ ▶▶I**
15 Display [**DISP.**]
16 • MP3/WMA Track -10
• Folder Down **∨**
• Preset Scan

Downloaded from Caradio-Manual.com Manuals

[LAC6900N] Front Panel / Remote Control

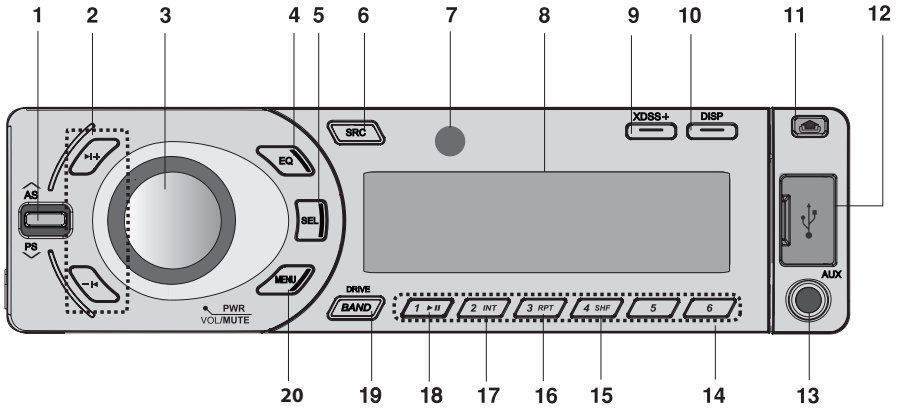

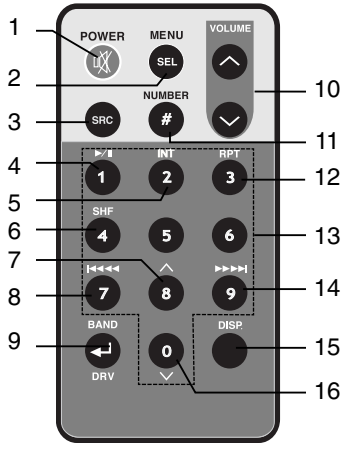

1 • Auto Store [**Λ/AS**]
• Preset Scan [**V/PS**]
• MP3/WMA Track +10/-10 **Λ/V**
• Folder Up/Down **Λ/V**
2 Skip / Search / Seek / Tune -**I◄** / **►I+**
3 • Volume
• [**MUTE**]
• Power [**PWR**]
4 Equalizer [**EQ**]
5 Select [**SEL**]
6 SOURCE [**SRC**]
7 Remote Sensor(Optional)
8 Display window
9 Extreme Dynamic Sound System [**XDSS+**]
10 Display [**DISP**]
11 Release ⏏
12 USB slot
13 AUX in
14 Preset Station [**1~6**]
15 Shuffle [**SHF**]
16 Repeat [**RPT**]
17 Intro Scan [**INT**]
18 Play/Pause **►/II**
19 • [**BAND**]
• [**DRIVE**]
20 • [**MENU**]

1 Power [**POWER**] / Mute 🔇
2 Select [**MENU/SEL**]
3 Source [**SRC**]
4 Play / Pause **►/II**
5 Intro Scan [**INT**]
6 Shuffle [**SHF**]
7 • MP3/WMA Track +10
• Folder Up **Λ**
• Auto Store
8 • CD Skip / Search
• Seek / Tune **I◄◄** **◄◄**
9 • [**BAND**]
• DRIVE [**DRV**]
10 Volume Up ^ / Down v
11 Number [**#**]
12 Repeat [**RPT**]
13 Number [**0 -9**]
14 • CD Skip / Search
• Seek / Tune **►►** **►►I**
15 Display [**DISP.**]
16 • MP3/WMA Track -10
• Folder Down **V**
• Preset Scan

Downloaded from Caradio-Manual.com Manuals

[LAC3900N / LAC5900N] About Detachable Control Panel

Attaching the control panel



1 Align the left side of the panel with the stopper.
2 Push the right side or panel into the unit until it clicks.



Caution

- The control buttons may not work properly if the control panel is not attached properly. If this occurs, gently press the display.
- Do not leave the control panel in any area exposed to high temperatures or direct sunlight.
- Do not drop the control panel or otherwise subject it to strong impact.
- Do not allow such volatile agents as benzine, thinner, or insecticides to come into contact with the surface of the control panel.

Detaching the control panel



1 Press the "⏏" (RELEASE) to open the control panel.
2 Hold the right part of the control panel.
3 Pull out the control panel.
4 Place the control panel in the supplied protective case.





Note



Periodically wipe the contacts on the back of the control panel with a cotton swap moistened with alcohol. For safety, turn off the ignition before cleaning, and remove the key from the ignition switch.

Downloaded from Caradio-Manual.com Manuals

[LAC6900N] About Detachable Control Panel

Attaching the control panel

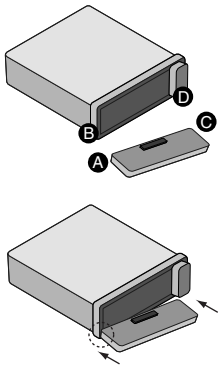

1 Attach part A of the control panel to part B of the unit.
2 Attach part C of the control panel to part D of the unit while pushing the control panel to left.
3 Close the control panel.

Caution

- When detaching or attaching the control panel, do not press the display or control buttons.
- The control buttons may not work properly if the control panel is not attached properly. If this occurs, gently press the control panel.
- Do not leave the control panel in any area exposed to high temperatures or direct sunlight.
- Do not drop the control panel or otherwise subject it to strong impact.
- Do not allow such volatile agents as benzine, thinner, or insecticides to come into contact with the surface of the control panel.
- Do not try to disassemble the control panel.

Detaching the control panel

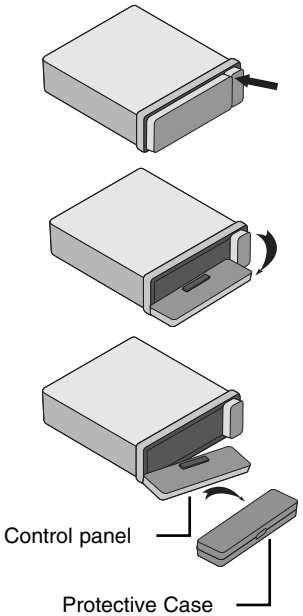

1 Press the " ⏏ " button to unlock the control panel.
2 Push the control panel to left.
3 Pull the control panel out of the unit.
4 Put the detached control panel into the protective case.

Note



Periodically wipe the contacts on the back of the control panel with a cotton swap moistened with alcohol. For safety, turn off the ignition before cleaning, and remove the key from the ignition switch.

Downloaded from Caradio-Manual.com Manuals

Installation

Basic Installation



Before installing, make sure that the ignition-switch is set to OFF and remove the terminal of the car battery to avoid short-circuiting.

1 Remove the existing receiver unit.
2 Make the necessary connections.
3 Install the installation sleeve.
4 Install the unit into the installation sleeve.

Removing the existing receiver unit



If there is already an installation sleeve for the receiver unit in the dashboard, it must be removed.

1 Remove the rear support from the unit.
2 Remove the control panel and trim ring from the unit.
3 Insert the lever Ⓐ into the hole on one side of the unit.
Perform the same operation on the other side and pull the unit out from the mounting sleeve.

ISO-DIN Installation



1 Slide the unit into the ISO-DIN frame.
2 Fit screws removed from the old unit.
3 Slide the unit and frame into the dash opening.
4 Install the dash panel or adapter plate.
5 Install the trim ring to the unit.
6 Install the control panel to the unit.

Battery Installation



1 Pull out the battery holder with a sharp product like a ball point pen.
2 Put the battery with ⊕ and ⊖ correctly on the battery holder.
3 Push the battery holder back into its original position.

Note

- Use only one CR2025 (3V) lithium battery.
- Remove the battery if the remote control is not used for a long period of time.
- Do not leave the product in a hot or humid place.
- Do not handle the battery with metallic tools.
- Do not store the battery with metallic materials.

Downloaded from Caradio-Manual.com Manuals

Connection

Before connecting, make sure that the ignition switch is set to OFF, and remove the battery ⊖ terminal to avoid short circuits.

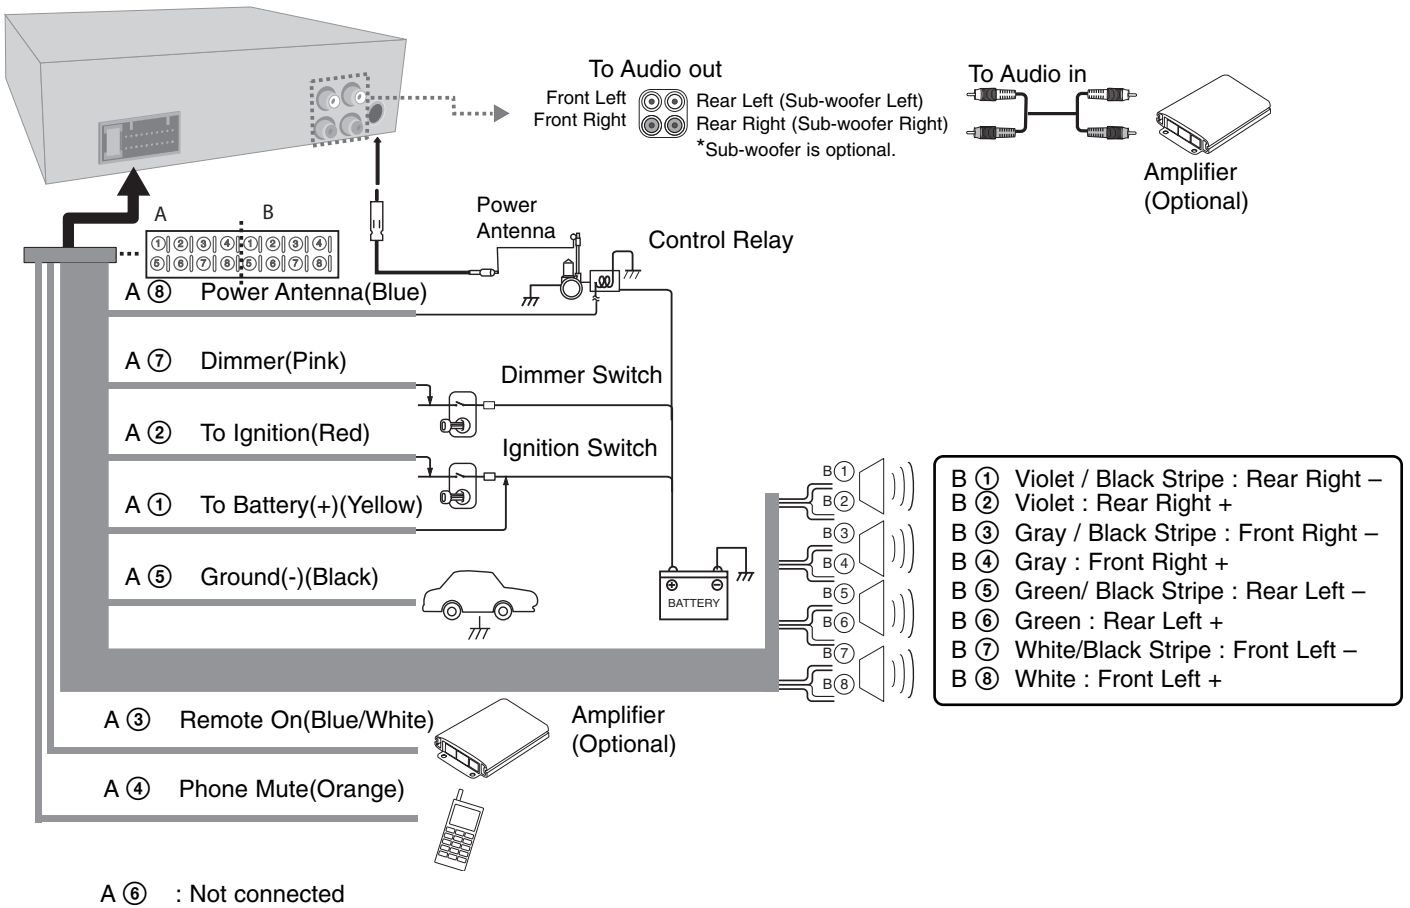

Downloaded from Caradio-Manual.com Manuals

Basic Operation

	ON PLAYER	ON REMOTE
1. Turn the unit on.	PWR	POWER
2. Select a source.	SRC	SRC
3. Adjust the volume.	Rotate PWR	VOLUME ∧ ∨

Basic operation - more you can do

Mute

Press **VOL/MUTE** (**POWER** on the remote control) to cut the sound. To cancel it, press again.

Using the EQ

EQ is to increase or decrease the signal strength of audio frequencies. The function helps you to enjoy sound more plentifully. Press **EQ** repeatedly. The indicator lights up in the following order.
POP → CLASSIC → ROCK → JAZZ → VOCAL → SALSA → SAMBA → REGGAE → RUSSY → USER1 → USER2 → Off (not displayed)

Note

- When XDSS+ is set to “Off”, you can adjust the EQ settings.
- You can adjust sound level to your preference. Once you select a USER mode and then adjust the sound level, it will be automatically stored for the currently selected USER mode. Refer to the “Adjusting the sound level” for USER 1/2 mode.

Adjusting the sound level

Press **SEL** (**SEL/MENU** on the remote control) repeatedly to select the mode you want to adjust from VOL(volume), BAL(left/right speaker), FAD(front/rear speaker) and SUB(Sub-woofer:optional). To adjust sound quality, rotate **PWR** or press **VOLUME** ∧ ∨ on the remote control.

Note

When EQ and XDSS+ is set to “Off”, you can also adjust the sound level (BAS(bass), MID(middle), TRB(treble)) settings.

XDSS+ (Extreme Dynamic Sound System)

Press **XDSS+ . (**XDSS+ : Improves the treble, bass sound.) To cancel it, press it again.

Checking the clock

You can see the clock pressing **DISP** (**DISP**. on the remote control).

Setting the clock

1 Press the **DISP**(**DISP**. on the remote control) and then, press and hold it for more 1 second.
2 Press the ▶I+(▶▶▶▶I on the remote control) to adjust the hour.
3 Press the -I◀ (I◀◀◀◀ on the remote control) to adjust the minute.
4 Press **DISP**(**DISP**. on the remote control) again to finish the setting.

Downloaded from Caradio-Manual.com Manuals

Listening to a CD

	ON PLAYER	ON REMOTE
1. Open the front panel. [Only in LAC6900N]	⏏	-
2. Insert a CD.	-	-
3. Adjust the volume.	Rotate PWR	VOLUME ∧ ∨

Listening to a CD - more you can do

Pause or restart a CD

Press ▶II on the player (▶/II on the remote control) during playback. Press this button again to resume play.

Search for a section within a track / file

Press and hold -I◀ / ▶I+ on the player (I◀◀ ◀◀/▶▶ ▶▶I on remote control) for about 1 second during playback and then release at the point you want.

Skip to another track / file

Press -I◀ / ▶I+ on the player (I◀◀ ◀◀/▶▶ ▶▶I on remote control.). To skip to previous track, press briefly -I◀ within 3 seconds of playing time. Press [#] and a number you want to move on remote control to move the files/track.

Intro scan

Press or press and hold **INT** on the player (**INT** on remote control). Each files in the current selected folder (🖿 **INT**) or the first 10 seconds of each tracks/files (**INT**) on the disc are played. To cancel it, press the button again.

Repeat

Press or press and hold **RPT** on the player (**RPT** on the remote control). The current selected tracks/files (**1 RPT**) or folder (🖿 **RPT**) on the disc is played repeatedly. To cancel it, press the button again.

Shuffle

Press or press and hold **SHF** on the player (**SHF** on the remote control). Each files in the current selected folder (🖿 **SHF**) or all of the tracks/files (**SHF**) on the disc is played randomly. Press **SHF** again to cancel it.

Note

During random playback, if you press -I◀ , you won't go back to the previous track.

MP3/WMA Track -10 / +10

(If there is no folder or one folder.) During playback push the button down to **V/PS** to go back 10 tracks, or push it up to **Λ/AS** to go forward 10 tracks.

MP3/WMA Folder UP/DOWN

(If there are more than two folders.) During playback, push the button down to **V/PS** to go back to the previous folder, or push it up **Λ/AS** to go forward to the next folder.

Checking information about your music

MP3/WMA files often come with tags. The tag gives the Title, Artist or Album. Press **DISP** repeatedly during MP3/WMA/CD TEXT file playback. If there is no information, "NO TEXT" will be shown in the display window.

Note

- 🖿 : The icon is displayed during MP3/WMA playback.
- **MP3/WMA Disc compatibility with this unit is limited as follows:**
  1. Sampling Frequency / 8 - 48kHz (MP3) 22.05 - 48kHz (WMA)
  2. Bit rate / within 8 - 320kbps (include VBR) (MP3) 32 -320kbps (WMA)
  3. CD-R/CD-RW file system should be "ISO 9660"
  4. If you record MP3/WMA files using software which cannot create a FILE SYSTEM, for example "Direct-CD" etc., it will not be possible to playback MP3/WMA files. We recommend that you use "Easy-CD Creator" which creates an ISO9660 file system.

Customers should also note that permission is required in order to download MP3/WMA files and music from the Internet. Our company has no right to grant such permission. Permission should always be sought from the copyright owner.

Downloaded from Caradio-Manual.com Manuals

Listening to the radio

	ON PLAYER	ON REMOTE
1. Select a source to tuner.	SRC	SRC
2. Select a band.	BAND	BAND
3. Auto seek.	-I◄ / ►I+	I◄◄◄◄/►►►►I
Manual seek.	Press and hold -I◄ / ►I+	Press and hold I◄◄◄◄/►►►►I

Listening to the radio - more you can do

Auto search memory

Push the button up to **∧/AS**. The six strongest broadcast frequencies will be stored under preset button 1-6 in the order of their signal strength.To cancel, push the button up to **∧/AS**.

Storing and recalling broadcast frequencies

1 Press **BAND** to select desired band you want to store.
2 Select the desired frequency and press one of preset buttons 1-6 and hold until the beep sound.
3 Repeat steps 1-2 to preset other stations.The next time, you press the same preset button, the radio station frequency is recalled from the memory.

To scan the preset stations

Push the button down to **∨/PS**. Each preset station appears. To cancel, push the button down to **∨/PS**.

To tune in the preset stations

Press **BAND** to select the desired band and press the desired preset button 1-6 (preset button 1-6 on the remote control).

Note

- When a station is stored on the preset numbers on which another station of the same band has already been preset, the previously preset station is automatically erased.

Connecting USB device(Optional)

	ON PLAYER	ON REMOTE
1. Open the USB cover.	-	-
2. Connect the USB device.	-	-
3. Adjust the volume.	Rotate PWR	VOLUME ∧ ∨

Moving to another drive

When connecting this unit to multi reader, press **BAND** (**BAND** on remote control) to go to the next drive. Each time you press the button, the driver modes changes.

Note

- If the USB device is already connected, press **SRC** (**SRC** on remote control.) to select a source to USB.
- Pause / Intro Scan / Repeat / Shuffle / ... functions are same with “Listening to a CD - more you can do”. Refer to the page 11.

Downloaded from Caradio-Manual.com Manuals

Connecting an Auxiliary Equipment

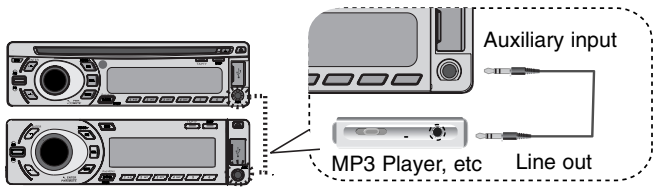

	ON PLAYER	ON REMOTE
1. Select a source to AUX.	SRC	SRC
2. Play the connected Auxiliary Equipment.	-	-
3. Adjust the volume.	Rotate PWR	VOLUME ^ v

Changing settings

	ON PLAYER	ON REMOTE
1. Select one item.	Press MENU	Press and hold SEL/MENU
2. Select a source.	Rotate PWR	VOLUME ^ v
3. Finish the setting .	Press MENU	Press SEL/MENU

- AUX (Auxiliary) ON / OFF
  It is possible to use auxiliary equipment with this unit. Activate the auxiliary setting when using auxiliary equipment connected to this unit.
- AUX (Auxiliary) 00dB / +6dB
  Ony when you set AUX to ON as switching sources, you can adjust the volume level of each source to prevent radical changes in volume.
  You can set to 0 dB or +6 dB. You may be surprised at a loud sound when you change the source from the external component to another source.
- DEMO OFF/ ON
  You can change the initial indication on the display to information name (function name, EQ name, etc...) while listening to a source.
- LCD WHI / RED
  You can change the LCD window color. WHI(white) <-> RED(red)
- [LAC3900N / LAC5900N] LED RED / GRN / AUTO
  [LAC6900N] LED BLU / RED / AUTO
  You can change the button color.
- COL TM (Color changing time)
  Only when you set LED to AUTO, you can set LED color changing time from 5 to 60 seconds.
- SW(Subwoofer) OFF / SW 55HZ / SW 85HZ / SW 120 HZ
  You can enable the subwoofer.
  SW OFF <-> SW 55HZ <-> SW 85HZ <-> SW 120 HZ.
- DIM(Dimmer) OFF / ON / AUTO
  You can change the brightness of the display window during the power-on status. When you set DIMMER to AUTO, the dimmer operates according to the car dimmer setting.
- DIM L (Dimmer Level)
  When you set DIM to ON/AUTO, you can adjust the dimmer level. (-2,-1,0,+1,+2)
- A-EQ(Auto EQ) ON/OFF
  AUTO EQ operates only in the music file supported with Genre in the device. When you set AUTO EQ to ON, POP, CLASSIC, ROCK, or JAZZ is automatically according to the music genre.
- BEEP 2ND / ALL
  BEEP 2ND : The beep is generated when a key is long pressed. (1 sec)
  BEEP ALL : The beep is generated when any key is pressed.

Downloaded from Caradio-Manual.com Manuals

Troubleshooting

	Symptom	Cause	Correction
General	Power doesn't turn on / The unit doesn't operate.	Leads and connectors are not properly.	Confirm once more that all connections are correct.
		The fuse is blown.	Rectify the problem that caused the fuse to blow, and then replace it. Be very sure to install the correct fuse with the same rate.
		Noise and other factors are causing the built-in microprocessor to operate incorrectly.	Turn the unit off and then on.
	No sound is heard / The volume level will not rise.	Cables are not connected correctly.	Connect the cables correctly.
CD	There's audio skipping.	This unit is not firmly secured.	Secure this unit firmly.
	The playback is not possi ble.	The disc is dirty.	Clean the disc.
		The loaded disc is of a type this unit cannot play.	Check what type the disc.
Radio	Radio stations cannot be tuned in.	The signal strength of the stations is too weak(when tuning in with automatic tuning.)	Tune in the stations manually.
		No station has been preset or preset stations have been cleared(when tuning by scanning preset stations.)	Preset the stations.(Refer to the page 12)
Remote control	The unit does not operate correctly even when the appropriate remote control buttons are pressed.	Battery power is low.	Load new battery.

Downloaded from Caradio-Manual.com Manuals

Specifications

General	
Output Power	53W x 4CH (Max.)
Power Source	DC 12V
Speaker impedance	4Ω
Ground System	Negative
Dimensions (W x H x D)	180 x 50 x 176 mm (Without Control Panel)
Net Weight	1.3 kg
Tuner	
FM	
Frequency Range	87.5-107.9, 87.5-108 MHz
S/N Ratio	55 dB
Distortion	0.7%
Usable Sensitivity	12 dBμV
AM (MW)	
Frequency Range	520-1720 or 522-1620 kHz
S/N Ratio	50 dB
Distortion	1.0%
Usable Sensitivity	28 dBμV
CD	
Frequency Response	20 Hz-20 kHz
S/N Ratio	80 dB
Distortion	0.12%
Channel Separation (1kHz)	55 dB
AUX	
Frequency Response	20 Hz-20 kHz
S/N Ratio	80 dB
Distortion	0.1 %
Channel Separation (1kHz)	45 dB
Max Input Level (1kHz)	1.1V
USB	
Version	USB 1.1
Line OUT	
Frequency Response	20Hz ~ 20 KHz
Output Voltage	1.8 V (Max.)
Subwoofer (optional)	
Frequency Response	20Hz ~ 120 Hz
Output Voltage	1.8 V (Max.)

Designs and specifications are subject to change without notice.

Downloaded from Caradio-Manual.com Manuals

P/NO : MFL60496422

Downloaded from Caradio-Manual.com Manuals